

GU DTU



G.U-BKS underfloor drives for swing doors are used in:

- historical buildings
- shopping centres
- hospitals
- hotels
- modern and transparent entrance areas

Transparency and concealed mechanics combined with functionality and high quality performance:

The innovative underfloor drive swingMaster DTU offers architects and planners a unique possibility of automating swing door systems.


On the basis of a well proven technology, all demands on a reliable, modern swing door drive are realised.

In modern shop construction it captivates by providing unobtrusive automation.


With this drive system the automation of all glass entrance systems or doors in historical or listed buildings is efficient and provides comfortable access to all users.

The use of an optional battery allows for a desmoking function.

Installation examples

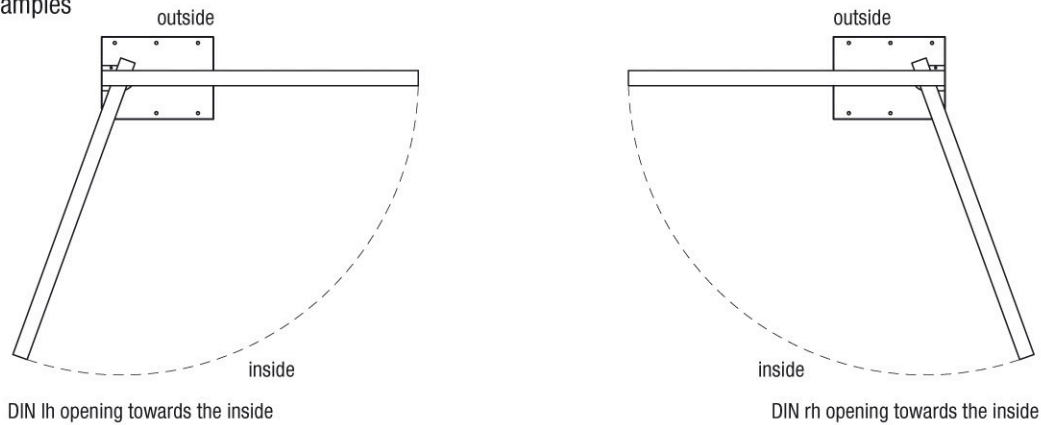

Dimensions

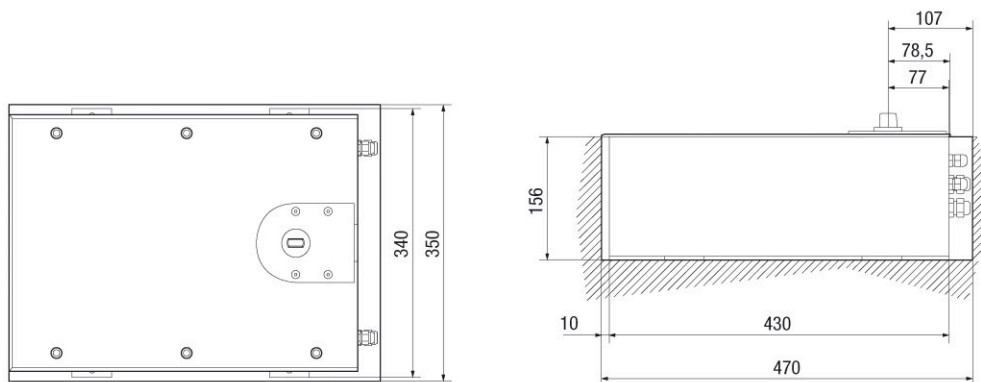

Technical data

Type of drive	swingMaster DTU	
Type	1 door leaf DTU-1	2 door leaves DTU-2 ^[1]
Opening angle	110°	
Mains voltage	230 V/AC, 50 Hz	
Dimensions		
Cement box	340 x 430 x 156 mm	
Floor recess	350 x 470 x 156 mm ^[2]	
Weight of door leaf	200 kg/max. door width 1100 mm 180 kg/max. door width 1200 mm 150 kg/max. door width 1400 mm	
Operation modes	Off / Automatic / Exit / Permanent open	
With power failure	optional battery for one-time opening	
Hold open time	adjustable	
Opening speed	adjustable	

Special solutions on request.

[1] Available on request.

[2] plus additional space for wiring

Accessories

■ stainless steel cover plate, 240 grid

■ cement box out of galvanised steel

Options

■ safety sensors in opening and closing direction

■ connection to building management technology